


Flow capacity: 1950L/Min
Nominal flow dia: 7.5mm

Material:
Chrome-plated steel, Chrome-plated brass, Stainless steel

Temperature range(NBR): -20°C to +100°C
Max. working pressure: 35 Bar

Standard and interchange:
ASIA, Rectus 03ka/13ka, Legris series LQAC, Nitto Kohki 200 series

Feature:
One-hand operated, One-hand operated are optional

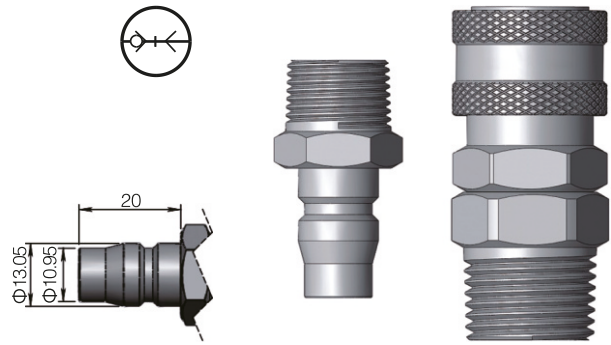


Dimensions

Socket

SM Type


Male



PART NO.					
Info	Thread	D2	L1	L2	CH
200-SM	R1/4	27	43	9	22
	R3/8	27	43	9	22
	R1/2	27	46	12	22

SF Type


Female



PART NO.					
Info	Thread	D2	L1	L2	CH
200-SF	G1/4	27	43	10	27
	G3/8	27	43	10	27
	G1/2	27	46	12	27

SH Type


Hose barb

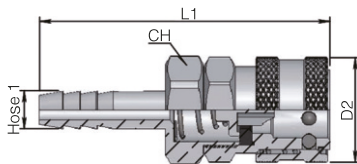

PART NO.					
Info	Hose	D2	L1	L2	CH
200-SH	6	27	60	25	27
	8	27	60	25	27
	10	27	60	25	27
	13	27	60	25	27

SP Type


Push-In



PART NO.					
Info	Hose	D2	L1	L2	CH
200-SP	6	27			
	8	27			
	10	27			
	12	27			


Plug

PM Type Male




PART NO.			
Info	Thread	L1	CH
200-PM	R1/4	41	14
	R3/8	41	17
	R1/2	46	22

PH Type Hose barb




PART NO.		
Info	Hose	L1
200-PH	6	49
	8	49
	10	49
	13	49

PF Type Female



PART NO.			
Info	Thread	L1	CH
200-PF	G1/4	35	17
	G3/8	35	19
	G1/2	38	24

PP Type Push-In



PART NO.		
Info	Hose	L1
200-PP	6	49
	8	49
	10	49
	12	49

Fittings,
Air Hose

Quick
Fittings

Mini Quick
Fittings

Rotary
Joint

Stop
Fittings

Check
Valves

Speed
Controllers

Hand
Valves

Ball
Valves

Air Control
Valves

Push-IN
Fittings

316L
Fittings

KIS-A
(ISO A)

KIS-B
(ISO B)

KIS-O

KIS-PP

KZD

KZF

ST

TSP

310
(ISO-B6)

430
(ISO-B8)

550
(ISO-B12)

20 (Super
Mini Type)

21
(Mini Type)

320
(EURO 7.6)

410
(EURO 10.5)

210
(ARO210)

19
(ASIA)

200
(ASIA)

Pipe
Fittings

Brass Ball
Valves

US98A,
UE95A

UCS

PA12,
PA6

UN54D

Air Gun

Tracheal
Scissors

Silencers