

Flow capacity: 1250L/Min
Nominal flow dia: 5.5mm

Material:

Socket: Hardened zinc-plated steel
Plug: Hardened zinc-plated steel

Temperature range(NBR): -20°C to +100°C


Max.working pressure: 35 Bar

Standard and interchange:

ARO 210, Rectus 14ka/22ka, Legris series ARO
Parker 50, Hansen 210, Foster 210

Feature:

One-hand operated, Durable in use, Optional pin-locking

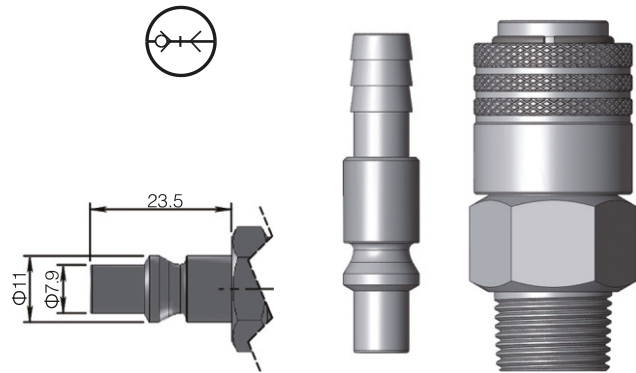


Dimensions

Socket

SM Type


Male



PART NO.					
Info	Thread	D2	L1	L2	CH
210-SM	R1/4	27	43	9	22
	R3/8	27	43	9	22
	R1/2	27	46	12	22

SF Type


Female



PART NO.					
Info	Thread	D2	L1	L2	CH
210-SF	G1/4	27	43	10	27
	G3/8	27	43	10	27
	G1/2	27	46	12	27

SH Type

Hose barb

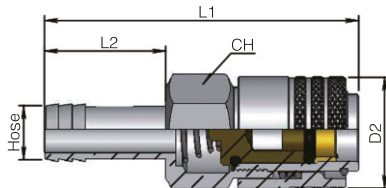


PART NO.					
Info	Hose	D2	L1	L2	CH
210-SH	6	27	60	25	27
	8	27	60	25	27
	10	27	60	25	27
	13	27	60	25	27

Plug

PM Type


Male



PART NO.					
Info	Thread	L1	L2	CH	
210-PM	R1/4	41	12	14	
	R3/8	41	12	17	
	R1/2	46	17	22	

PH Type


Hose barb



PART NO.		
Info	Hose	L1
210-PH	6	49
	8	49
	10	49
	13	56

PF Type

Female



PART NO.			
Info	Thread	L1	CH
210-PF	G1/4	36	17
	G3/8	36	19
	G1/2	39	24

Fittings,
Air Hose

Quick
Fittings

Mini Quick
Fittings

Rotary
Joint

Stop
Fittings

Check
Valves

Speed
Controllers

Hand
Valves

Ball
Valves

Air Control
Valves

Push-IN
Fittings

316L
Fittings

KIS-A
(ISO A)

KIS-B
(ISO B)

KIS-O

KIS-PP

KZD

KZF

ST

TSP

310
(ISO-B6)

430
(ISO-B8)

550
(ISO-B12)

20 (Super
Mini Type)

21
(Mini Type)

320
(EURO 7.6)

410
(EURO 10.5)

210
(ARO210)

19
(ASIA)

200
(ASIA)

Pipe
Fittings

Brass Ball
Valves

US98A,
UE95A

UCS

PA12,
PA6

UN54D

Air Gun

Tracheal
Scissors

Silencers