





Symbol




Ordering code

2W		025		08		B		S		E		AC110V	
Model		Orifice size		Port size		Material of body		Coil form		Sealing material		Standard voltage	
2W	2/2 Way direct acting	012	1.2mm	06	1/8"	Blank	Brass	Blank	Round coil	Blank	NBR	DC12V	
2WH	2/2 Way solenoid valve for high pressures	020	2mm	08	1/4"	B	Stainless steel	S	Square coil IP65	E	EPDM	DC24V	
		025	2.5mm	10	3/8"					V	VITON	AC24V	50Hz/60Hz
		040	4mm							S	SI	AC110V	50Hz/60Hz
												AC220V	50Hz/60Hz
												AC380V	50Hz/60Hz

Flow chart

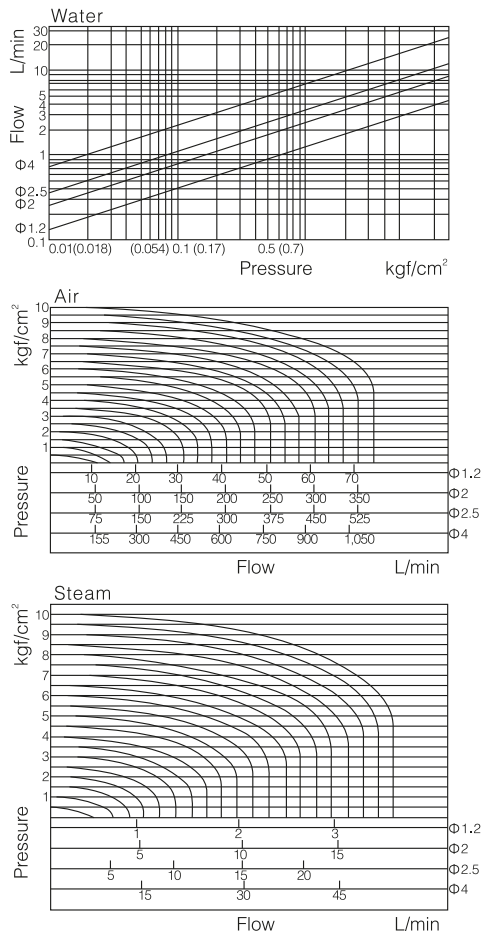

Dimensions

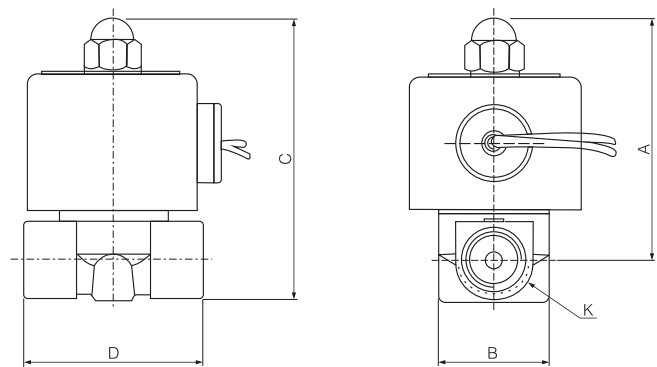

Dimension sheet

Model	A	B	C	D	K
2W025-06	62.5	30	71.5	40.5	1/8"
2W025-08	62.5	30	71.5	40.5	1/4"
2W040-10	70	32	80	55	3/8"
2WH012-06	62.5	30.3	71.5	40.5	1/8"
2WH012-08	62.5	30.3	71.5	40.5	1/4"
2WH020-10	70	32.2	80	52.5	3/8"

Valve

2P

2V

2W

2W(Big)

2WB

2WBF

US(2L)

DG223

DG523

0927/0955

PU220

PU225

VX

QX

PT

Q24J_H

K23J_H

K25J_H

K25J_H

K35J_H

K23JD

K25JD

K25JK

PV100

PV200

PV300

PV400

PV500

PV700

PV800

PV1527

PVN

MV100

MV200

NAA

GT

K

R

FAL

FP-M

NTP

SX

Valve

2P

2V

2W

2W(Big)

2WB

2WBF

US(2L)

DG223

DG523

0927/0955

PU220

PU225

VX

QX

PT

Q243H

K23J₀

K25J₀

K25J₀H

K35J₀H

K23JD

K25JD

K25JK

PV100

PV200

PV300

PV400

PV500

PV700

PV800

PV1527

PVN

MV100

MV200

NAA

GT

K

R

FAL

FP-M

NTP

SX



Product feature

Protection degree is IP67, these valves can be supplied with manual operation.



Ordering code

2W	160	15
Model	Orifice size	Port size
2W 2/2 Way solenoid valve	160 16mm	10 3/8"
	160 16mm	15 1/2"
	200 20mm	20 3/4"
	250 25mm	25 1"
	350 35mm	35 1 1/4"
	400 40mm	40 1 1/2"
	500 50mm	50 2"


A	E
Coil form	Sealing material
A Waterproof coil	Blank NBR
Blank Round coil	E EPDM
S Square coil IP65	V VITON
H Manual	S SI
NO Normally open	
NC Normally close	
Z EX-proof	

AC110V
Standard voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Flow chart

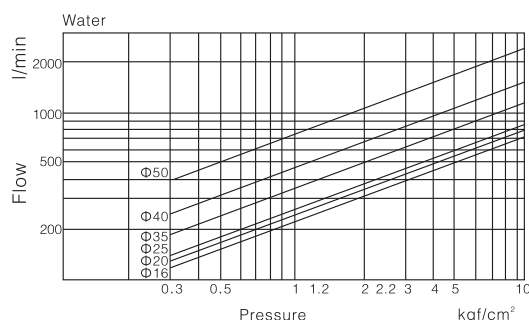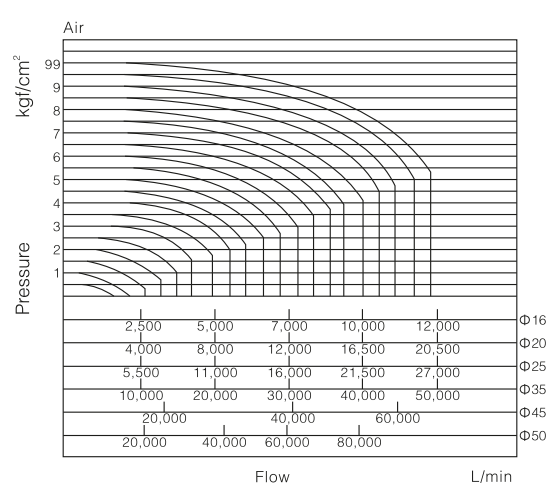

Dimensions

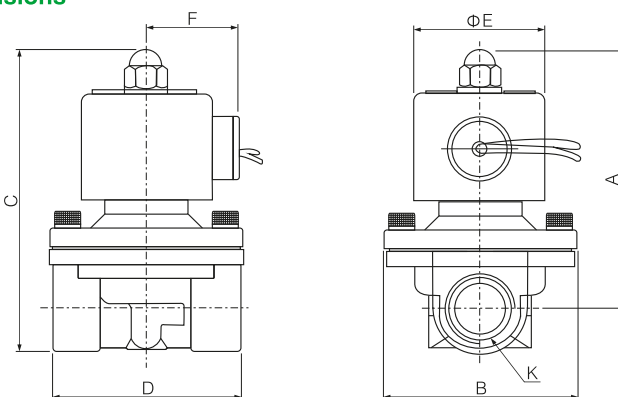

Model	A	B	C	D	K
2W160-10	90	56	103	66	3/8"
2W160-10-NO	112		125		
2W160-15	90	56	103	66	1/2"
2W160-15-NO	112		125		
2W200-20	94	56	110	73	3/4"
2W200-20-NO	116		132		
2W250-25	98	73	117	99	1"
2W250-25-NO	120		139		
2W350-35	135	93	160	118	1 1/4"
2W350-35-NO	155		180		
2W400-40	135	93	160	118	1 1/2"
2W400-40-NO	155		180		
2W500-50	153	124	188	160	2"
2W500-50-NO	174		209		