

Fittings, Air Hose

Quick Fittings Mini Quick Fittings

Rotary Joint Stop Fittings Check Valves Speed Controllers

Hand Valves

Ball Valves

Air Control Valves

Push-IN Fittings

316L Fittings

KIS-A (ISO A)

KIS-B (ISO B)

KIS-O

KIS-PP

KZD

KZF

ST

TSP

310 (ISO-B6)

430 (ISO-B8)

550 (ISO-B12)

20 (Super Mini Type)

21 (Mini Type)

320 (EURO 7.6)

410 (EURO 10.5)

210 (ARO210)

19 (ASIA)

200 (ASIA)

Pipe Fittings

Brass Ball Valves

US98A, UE95A

UCS

PA12, PA6

UN54D

Air Gun

Tracheal Scissors

Silencers

Flow capacity: 3900L/Min
Nominal flow dia: 10.5mm

Material:

Socket: Nickel-plated brass/steel
Plug: Hardened zinc-plated steel

Temperature range(NBR): -20°C to +100°C


Max. working pressure: 35 Bar

Standard and interchange:

10.5 EURO10.5, Rectus 27ka, Legris series 27,
Parker RF-3/8, PEF53, Tema 1700, Cejn 410

Feature:

One-hand operated, High flow poppet design, Durable in usage

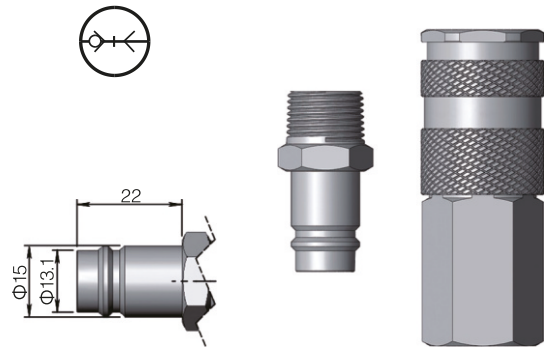


Dimensions

Socket

SM Type


Male



PART NO.					
Info	Thread	D2	L1	L2	CH
410-SM	R3/8	27	63	12	24
	R1/2	27	65	17	24
	R3/4	27	65	17	27

SF Type


Female



PART NO.					
Info	Thread	D2	L1	L2	CH
410-SF	G1/4	27	56	10	24
	G3/8	27	56	11	24
	G1/2	27	56	12	24
	G3/4	27	60	16	32

SH Type


Hose barb



PART NO.				
Info	Nut	D2	L2	CH
410-SH	12x8	27	67	24
	16x11	27	69	24

SN Type

Nut for hose




PART NO.					
Info	Hose	D2	L1	L2	CH
410-SN	10	27	76	27	24
	13	27	76	27	24
	16	27	76	27	24
	19	27	76	27	24

Plug

PM Type


Male



PART NO.					
Info	Thread	L1	L2	CH	
410-PM	R1/4	12	40	17	
	R3/8	12	40	17	
	R1/2	17	45	22	
	R3/4	17	48	27	

PH Type


Hose barb



PART NO.			
Info	Hose	L1	L2
410-PH	8	48	25
	10	48	25
	13	48	25
	16	49	25
	19	49	25

PF Type


Female



PART NO.					
Info	Thread	L1	L2	CH	
410-PF	G1/4	9	33	17	
	G3/8	9	33	19	
	G1/2	12	37	24	
	G3/4	16	42	32	

PN Type

Nut for hose



PART NO.			
Info	Nut	L1	CH
410-PN	12x8	45	19
	16x11	47	22