

Fittings, Air Hose

Quick Fittings Mini Quick Fittings

Rotary Joint Stop Fittings

Check Valves

Speed Controllers

Hand Valves

Ball Valves

Air Control Valves

Push-IN Fittings

316L Fittings

KIS-A (ISO A)

KIS-B (ISO B)

KIS-O

KIS-PP

KZD

KZF

ST

TSP

310 (ISO-B6)

430 (ISO-B8)

550 (ISO-B12)

20 (Super Mini Type)

21 (Mini Type)

320 (EURO 7.6)

410 (EURO 10.5)

210 (ARO210)

19 (ASIA)

200 (ASIA)

Pipe Fittings

Brass Ball Valves

US98A, UE95A

UCS

PA12, PA6

UN54D

Air Gun

Tracheal Scissors

Silencers

Flow capacity: 3750L/Min
Nominal flow dia: 11.5mm

Material:

Socket: Nickel-plated brass/steel
Plug: Hardened zinc-plated steel

Temperature range(NBR): -20°C to +100°C


Max. working pressure: 35 Bar

Standard and interchange:

ISO 6150B-1/2, MIL-C-4109-1/2, Rectus 37ka/40ka,
Parker 20-1/2, 30-1/2, Hansen 5000, Foster 50

Feature:

One-hand operated, High-flow capacity, Low connection force

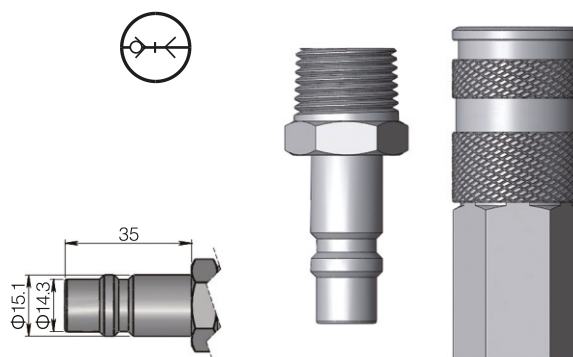


Dimensions

Socket

SM Type


Male



PART NO.					
Info	Thread	D2	L1	L2	CH
550-SM	NPT1/4	35	12	74	30
	NPT3/8	35	12	74	30
	NPT1/2	35	17	79	30
	NPT3/4	35	19	81	30

SF Type


Female



PART NO.					
Info	Thread	D2	L1	L2	CH
550-SF	NPT1/4	35	13	76	30
	NPT3/8	35	14	77	30
	NPT1/2	35	23	83	30
	NPT3/4	35	24	84	32

SH Type

Hose barb

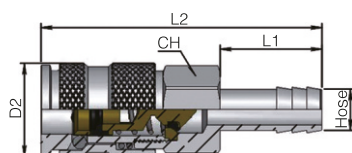


PART NO.					
Info	Hose	D2	L1	L2	CH
550-SH	6	35	25	86	30
	8	35	25	86	30
	10	35	25	86	30
	13	35	25	86	30
	16	35	25	86	30
	19	35	25	86	30

Plug

PM Type


Male



PART NO.					
Info	Thread	L1	L2	CH	
550-PM	NPT1/4	12	53	17	
	NPT3/8	12	53	17	
	NPT1/2	17	59	22	
	NPT3/4	19	62	27	

PH Type


Hose barb



PART NO.				
Info	Hose	L1	L2	
550-PH	6	25	62	
	8	25	62	
	10	25	62	
	13	25	62	
	16	25	62	
	19	35	72	

PF Type

Female



PART NO.					
Info	Thread	L1	L2	CH	
550-PF	NPT1/4	13	56	17	
	NPT3/8	14	56	19	
	NPT1/2	23	61	24	
	NPT3/4	24	62	32	