


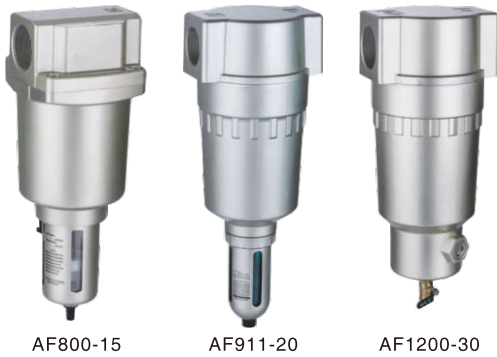

Ordering code


Series	Function	Body size	Automatic drainer	Port size
A	F	9	00	20
	F Filter	8 1½"	00 No automatic drain	15 1½"
		9 2"	11 Automatic drain	20 2"
		12 3"		30 3"

Specification


Model	AF800-15	AF900-20	AF1200-30
Port size	1½"	2"	3"
Max. working pressure	1.0MPa		
Ensure pressure resistance	1.5MPa		
Environment & fluid temperature	-5~60°C (Not frozen)		
Filter precision	Standard: 5µm		
Protective cover	Yes		
Material of water cup	PC		
Rating flow (L/min)	12000	20000	28000

Note: PT thread, G thread and NPT thread are available.

Symbol



Dimensions

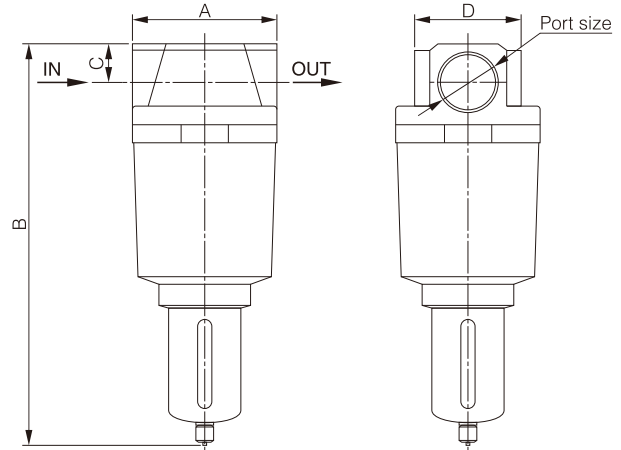

Model	Port size	Standard specification			
		A	B	C	D
AF800-15	1½"	120	331	31.5	88
AF900-20	2"	200.5	517.5	47	91
AF1200-30	3"	257	600	68	225

AL Series High Flow Rate Lubricator



Ordering code


Series	Function	Body size	Port size
A	L	900	20
	L Lubricator	800 1½"	15 1½"
		900 2"	20 2"

Specification


Model	AL800-15	AL900-20
Port size	1½"	2"
Max. working pressure	1.0MPa	
Environment & fluid temperature	-5~60°C (Not frozen)	
Min. flow of oil drop (L/min)	650	1800
Recommended oil	Turbine NO.1 oil ISO VG32	
Protective cover	Yes	

Note: PT thread, G thread and NPT thread are available.

Symbol



Dimensions

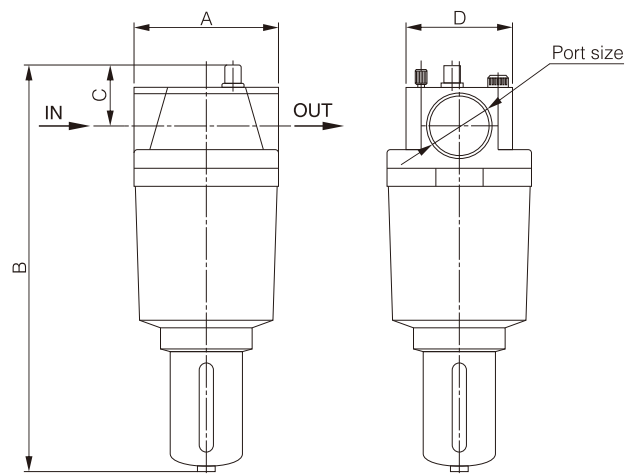

Model	Port size	Standard specification			
		A	B	C	D
AL800-15	1½"	120.5	318	47	91
AL900-20	2"	120.5	338	58	91

FRL

AC/BC

AFC/BFC

AFR/BFR

AF/BF

AR/BR

AL/BL

SR

SDR

AC

AW

AF

AR

AL

F3

F2

F1

F

R

L

USFRL

USFR/L

USFR

USF

USR

USL

QSL

QTY

QIU

QTYH

QSLH

QFRH

AFF

AF(Big)

AL(Big)

AR(Big)

AD402

AH402

AD-5

IR

ITV

ACR

F804

PG