






CS1-H
CS1-H-QD

CS1-HN
CS1-HN-QD
CS1-HP
CS1-HP-QD

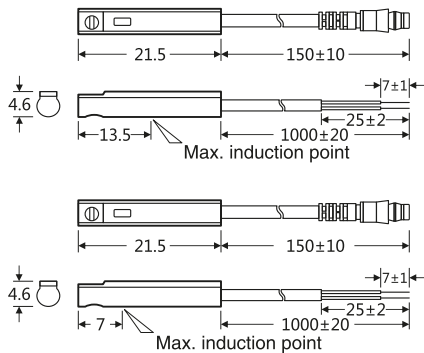


Characteristic	type	CS1-H	CS1-HN	CS1-HP
Switch logic		SPST NO	Electrical Non-contact; NO	
Sensor type		Contact-reed style	Non-contact solid state NPN	Non-contact solid state PNP
Opreating voltage		5~120V DC/AC	5~240V DC/AC	5~30V DC
Switching current		100mA max	200mA max	
Contact rating		10W max	6W max	
Internal current consumption		Non	20mA max@24V (Switch active)	
Voltage drop		2.5V max@100mA	0.5V max@200mA	
Leakage current		Non	0.01mA max	
Indicator		Red LED	Red LED	Green LED
Cable		3.2Φ, 2C, Brown-oil resistance (PVC)	3.2Φ, 3C, Black-oil resistance (PVC)	
Sensitivity (Note 1)		60 Gauss		
Max.switch frequency		1000Hz	1000Hz	
Temperature range		-10~70℃		
Shock (Note 2)		30G	50G	
Vibration (Note 3)		9G		
Protection classification		IEC 529 IP67(NEMA6)		
Protection circuit		Without	With protection circuit	
Circuit diagram				

Suitable for SMC, CHELIC, CHANTO standard cylinder



QD connector diagram

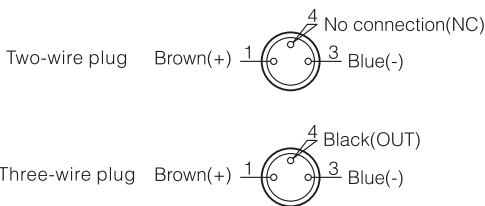

- Note:**
- Standard magnet for measurement: Φ15.5×Φ8×5T (orthorhombic rubber magnet).
 - Sine wave/X, Y, Z 3 axial/3 loops (each direction) /11ms.
 - The complex amplitude is 1.5mm/10Hz~55Hz~10Hz (reciprocating for 1 minute) /X, Y, Z 3 axial/hour (each cycle).

Cylinder Switch
CS1-U
CS1-F
CS1-S
CS1-J
CS1-C
CS1-S ₁
CS1-M
CS1-G
CS1-G ₁
CS1-M ₁
CS1-J ₁
CS1-D
CS1-H
CS1-L
CS1-E
CS1-Z
M8
Fixation clamp
Fixation belt