


Valve

2P
2V
2W
2W(Big)
2WB
2WBF
US(2L)
DG223
DG523
0927/0955
PU220
PU225
VX
QX
PT
Q24H
K23J
K25J
K25H
K35H
K23JD
K25JD



Symbol

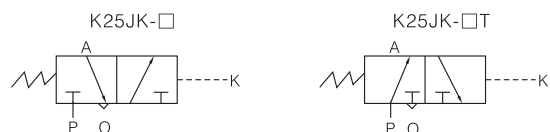


Ordering code

K25J		K	F	8	T	W
Model		Control mode		Port size	Initial state	
K25J	Two position five way shut-off type directional valve	K	F	6 1/8"	Blank	Normal close
				8 1/4"	T	Normal open
				10 3/8"	Wuxi type	
				15 1/2"		
				20 3/4"		
				25 1"		
Connection form				32 1 1/4"		
	Blank			40 1 1/2"		
F	Plate connection type					

Specifications

Model	K25JK-6W	K25JK-8W	K25JK-10W	K25JK-15W	K25JK-20W	K25JK-25W	K25JK-32W	K25JK-40W
Nominal diameter (mm)	6	8	10	15	20	25	32	40
Effective section area (mm ²)	10	20	40	60	110	190	300	400
Working pressure range	0.2~0.8MPa							
Minimum control pressure	0.3MPa							
Response time (s)	0.04		0.06		0.1		0.15	0.2
Minimum working frequency (Hz)	1/30							
Lifespan (1000 times)	≥1500							

Dimensions

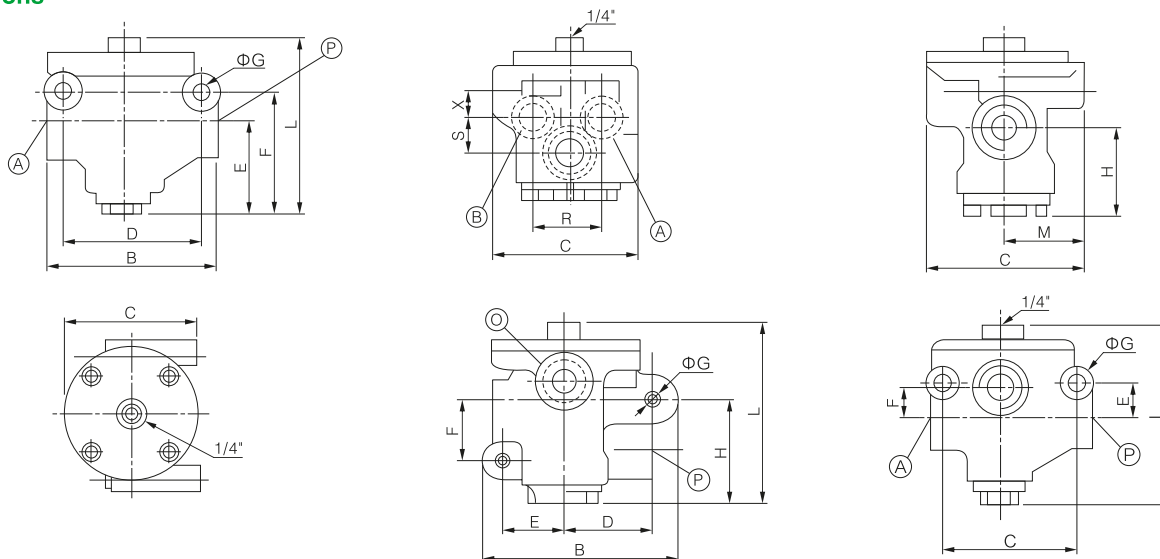

Model	L	L1	L2	B	H	H1	H2	d	d1	d2
K25JK-6W	60	50	33	55	75	58	18	1/8"	5.5	1/8"
K25JK-8W								1/4"		
K25JK-10W	92	72	51	77	104	70	17	3/8"		
K25JK-15W								1/2"		
K25JK-20W	117	82	57	94	97	66	23	3/4"		
K25JK-25W								1"		
K25JK-32W	170	117	72	130	176.2	116.7	38	1¼"		
K25JK-40W								1½"		