

Fittings,
Air Hose

Quick
Fittings

Mini Quick
Fittings

Rotary
Joint

Stop
Fittings

Check
Valves

Speed
Controllers

Hand
Valves

Ball
Valves

Air Control
Valves

Push-IN
Fittings

316L
Fittings

KIS-A
(ISO A)

KIS-B
(ISO B)

KIS-O

KIS-PP

KZD

KZF

ST

TSP

310
(ISO-B6)

430
(ISO-B8)

550
(ISO-B12)

20 (Super
Mini Type)

21
(Mini Type)

320
(EURO 7.6)

410
(EURO 10.5)

210
(ARO210)

19
(ASIA)

200
(ASIA)

Pipe
Fittings

Brass Ball
Valves

US98A,
UE95A

UCS

PA12,
PA6

UN54D

Air Gun

Tracheal
Scissors

Silencers



Materials

Coupling: Steel (zinc chromate plating)

Nipple: Hardened steel (zinc chromate plating)

Product feature

1. Meets the requirements of ISO7241-1-Series A.
2. Double acting sleeve (Push-pull) Can push-connecting or pull-disconnection.
3. Modular construction, wide choice of connecting structure, meets international standard, for example ISO, DN,SAE, BS.
4. Primary parts are quenched for durability.
5. Couplers and nipple are precision machined from qualified carbon steel bar.
6. Dust caps are available.

Interchange


Parker 2000 Faster CPV-CNV, Hydac HP Series

Specifications


Body size	2	3	4	6	8
Rated pressure (MPa)	34.5	27.6	27.6	17.3	13.8
Rated flow (L/Min)	11	22	45	105	185
Temperature range (std seals)	-20℃~+80℃				

Ordering code

K	I	S	-	2	PP	-	G	02	SP
Body 2, 3, 4, 6, 8					O.D. or Thread				SP
Series PD, PDB, PM									PF
									SF
									Whole
									Nipple
									Coupling

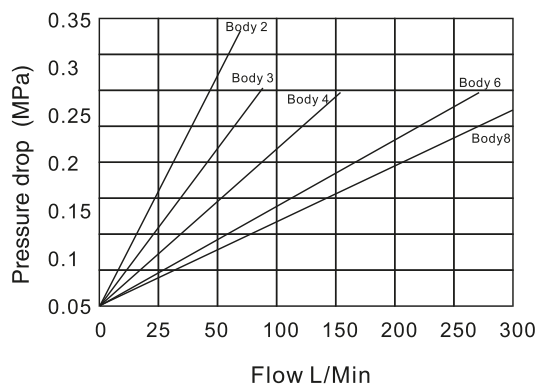

Dimensions

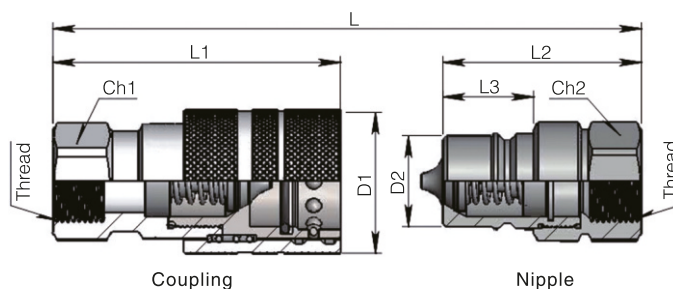

PART NO.	ISO	Thread	L	L1	L2	L3	D1	D2	Ch1	Ch2
KIS-2PP-G02SP	6.3	G1/4	89.5	64	44	18.5	26	12	19	19
KIS-3PP-G03SP	10	G3/8	95	67	51	22.8	32	17.3	22	22
KIS-4PP-G04SP	12.5	G1/2	99.3	71	61	32.7	38	20.5	27	27
KIS-6PP-G06SP	20	G3/4	126.5	92	65	30.5	46	29	36	36
KIS-8PP-G08SP	25	G1	139	104	72	37	50	34.3	41	41