

Valve

2P
2V
2W
2W(Big)
2WB
2WBF
US(2L)
DG223
DG523
0927/0955
PU220
PU225
VX
QX
PT

Q24JH
K23JG
K25JG
K25JH
K35JH
K23JD
K25JD
K25JK
PV100
PV200
PV300
PV400
PV500
PV700
PV800

PV1527

PVN

MV100
MV200
NAA
GT
K
R
FAL
FP-M
NTP
SX



PV1527-A

PV1527-B


Product feature

2/2-way Angle-Seat Valve
Pneumatically Operated, for
medium up to +120°C, Stainless
steel Actuator Dia 27mm
female threaded
port Connection, DN15

1. Compact style 2/2-way stainless steel valve;
2. Movable seat & V shape seals ensure reliable and effective performance;
3. Valve in Y type installation and horizontal installation is optional;
4. Double acting NC and double acting is optional.


Symbol

Control function I
(double-acting actuator)




Dimensions

Y-type filling valve

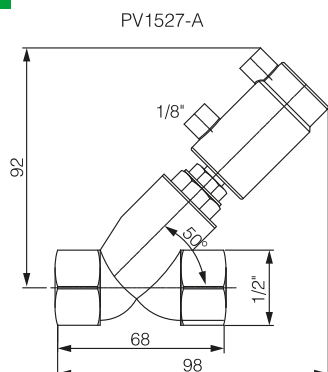

PV1527-A

filling valve (Horizontal installation)

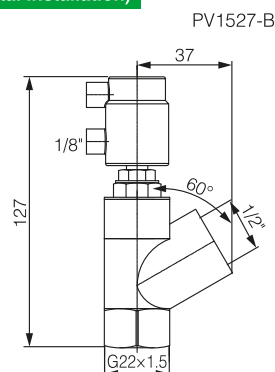

PV1527-B

PVN Series Angle Seat Valve (Piston Valve/NAMUR Type Actuator)

Product feature

2/2-way Angle-Seat Valve for
medium up to +180°C,
NAMUR type Actuator
connection is available on
customer request
DN 15-65

1. NAMUR direct connections on piloting head, direct coupling with solenoid valve;
2. Modular universal accessories can be assembled on NC and NO universal actuators' head.




NAMUR type actuator

1. Namur interface allows easy installation of pilot valve to actuator
2. Increased operational reliability when using the NAMUR pilot valves type 4M310-08/10

Actuator size

Port size	Standard actuator size (mm)	
	PA	
DN15	50	Available
DN20	50, 63, 80	Available
DN25	50, 63, 80	Available
DN32	63, 80	
DN40	63, 80	
DN50	63, 80	
DN65	80, 100	

NAMUR Port

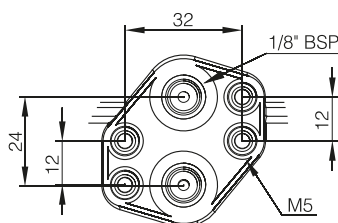

Standard Port

