



Specifications






Bore size(mm)	25	32	40	50	63
Action form	Double acting				
Using fluids	Air				
Operating pressure range	1.5~9.5 kgf/cm ² (150~950 MPa)				
Service temperature (°C)	0~60				
Speed of use (mm/sec)	30~500				
Slewing stroke (mm)	11	13	15		
Down stroke (mm)	11	13	15		
Rotation angle	90° Customizable(0°, 45°, 60°)				
Rotation direction	Turn left (right to left) -L, turn right (left to right) -R				
Buffer type	Rubber gasket cushion				
lubrication	Free supply mode				
Pipe size	M5×0.8				

Ordering code

SRC	R	32	×	13	-	D
Model	Rotation direction	Bore size	Stroke	Press plate type		
SRC Rotary clamp cylinder	L Left turn R Right turn	25 25mm 32 32mm 40 40mm 50 50mm 63 63mm	Φ25 11mm Φ32 13mm Φ40 13mm Φ50 15mm Φ63 15mm	Blank Single side pressing plate D Bilateral pressing plate	Note: Φ25 without double side pressing plate	

Stroke indicates downforce stroke
(swing travel not included)

Dimensions

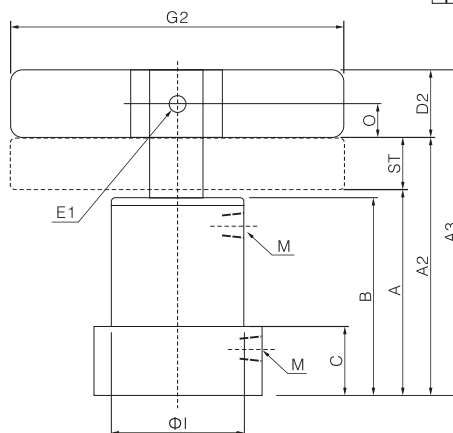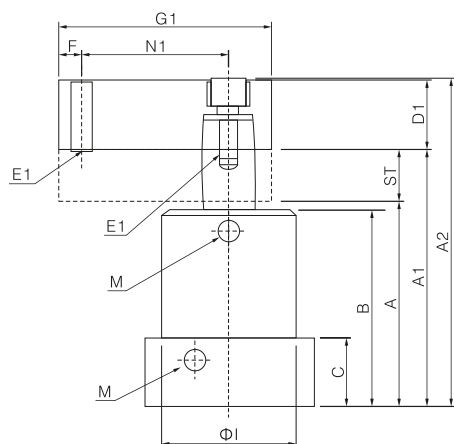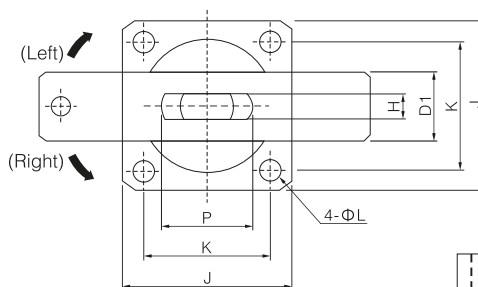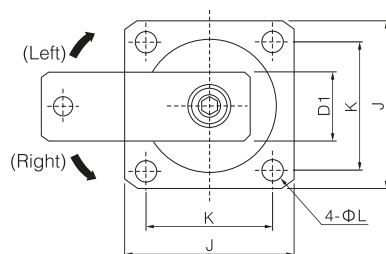

Bore size(mm)	ST	A	A1	A2	A3	B	C	D1	D2	E1	E2	F	G1	G2	H	I	J	K	L	M	N1	O	P	Q	R	S	T	U
25	22	67	89	(80)	-	65	23	15.9	-	M6×1.0p	-	6	50	-	-	35	38	30	4.6	M5×0.8P	35	-	-	6.8	11.5	14	5	8.5
32	26	82	108	(100)	127	78	28	19	19	M8×1.25p	8	8	70	140	9	46	50	40	5.6	1/8"	50	9.5	23	9	14	16	7	9.5
40	26	82	108	(104)	127	78	28	19	19	M8×1.25p	8	8	70	140	9	55	60	48	5.8	1/8"	55	9.5	23	9	14	16	7	9.5
50	30	94	124	(117)	146.2	90	31	25.4	22.2	M10×1.5p	8	10	95	160	10	65	70	58	6.8	1/8"	60	11.1	29	11	18	20	9	12.5
63	30	94	124	(117)	146.2	90	31	25.4	22.2	M10×1.5p	8	10	95	160	10	78	83	67	9	1/8"	70	11.1	29	11	18	20	9	12.5