





Symbol




Ordering code

US(2L)		15	SS	F	AC220V
Model		Port size	Material of body		Standard voltage
US(2L)	2/2 Way solenoid valve	15 1/2"	S.S.	Stainless steel	DC12V
		20 3/4"	Blank	Brass	DC24V
		25 1"			AC24V 50Hz/60Hz
		35 1 1/4"			AC110V 50Hz/60Hz
		40 1 1/2"			AC220V 50Hz/60Hz
		50 2"			AC380V 50Hz/60Hz

Flow chart

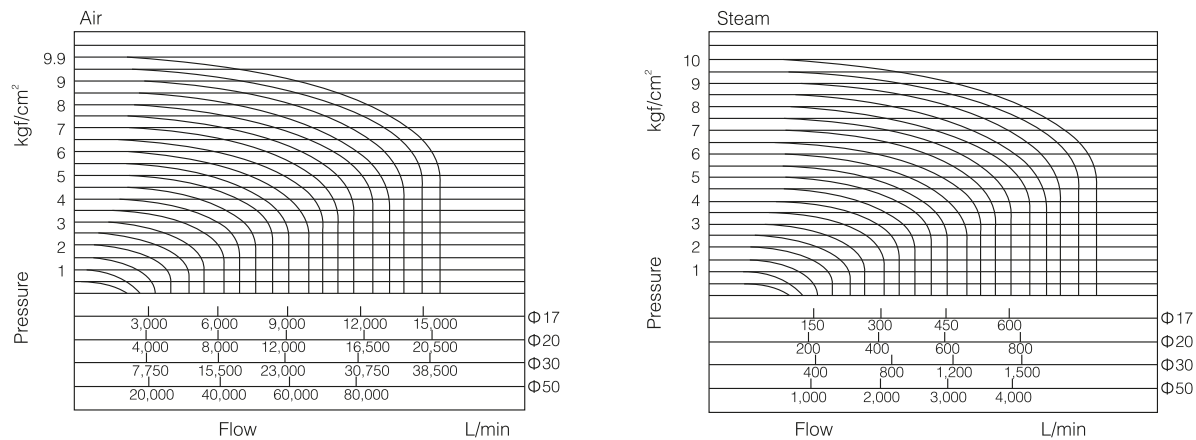

Dimensions

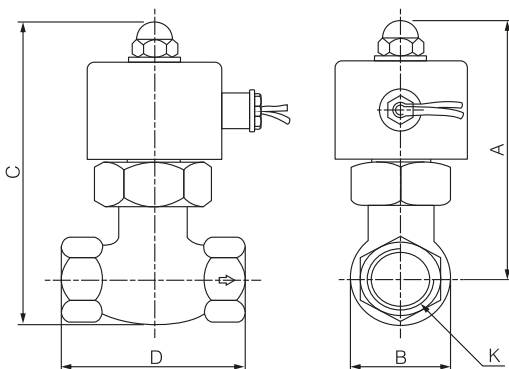

Model	A	B	C	D	K
US(2L)-10	125	42	146	84	3/8"
US(2L)-15	125	42	146	84	1/2"
US(2L)-20	125	42	146	84	3/4"
US(2L)-25	136	52	162	94	1"
US(2L)-35	148	74	183	111	1 1/4"
US(2L)-40	147	74	183	111	1 1/2"
US(2L)-50	176	86	223	165	2"

Valve

2P
2V
2W
2W(Big)
2WB
2WBF
US(2L)
DG223
DG523
0927/0955
PU220
PU225
VX
QX
PT
Q24J ₀ H
K23J ₀
K25J ₀
K25J ₀ H
K35J ₀ H
K23JD
K25JD
K25JK
PV100
PV200
PV300
PV400
PV500
PV700
PV800
PV1527
PVN
MV100
MV200
NAA
GT
K
R
FAL
FP-M
NTP
SX