

FRL

AC/BC

AFC/BFC

AFR/BFR

AF/BF

AR/BR

AL/BL

SR

SDR

AC

AW

AF

AR

AL

F3

F2

F1

F

R

L

USFRL

SFR/L

SFR

SF

SR

SL

QSL

QTY

QIU

QTYH

QSLH

QFRH

AFF

AF(Big)

AL(Big)

AR(Big)

AD402

AH402

AD-5

IR


ITV

ACR

F804

PG

Symbol



Lubricator



Product feature

1. For high pressure use and chemical resistance.
2. Good performance in chemically working environments and outdoor facility.
3. Suitable for semi-conductor industry.
4. Lubricator oil can be replenished without stopping air supply.
5. Oil spray in mist ensures good lubrication for machines.
6. Light weight; compact size for space saving.
7. Corrosion resistance.

Ordering code


SL	-	200	-	02	N	H
Model		Body size		Port size	Thread	Pressure
SL	SL Combination	200		02 1/4"	Blank G	Blank 0~16kg/cm ²
		400		03 3/8"	N NPT	H 0~40kg/cm ²
		600		04 1/2"	R Rc	
				06 3/4"		
				10 1"		

Specification

Model	SL-200 / 400 / 600				
Port size	1/4"	3/8"	1/2"	3/4"	1"
Fluid	Compressed air				
Body material	Stainless steel SUS316				
Bowl material	Stainless steel SUS316				
Operating pressure range	0~8 kgf/cm ²				
Proof pressure	30 kgf/cm ²				
Max. flow rate l/min (ANR)	2500				
Ambient temperature	-5℃~100℃				
Accessories	Mounting bracket, Screw × 2				

Dimensions

SL-200

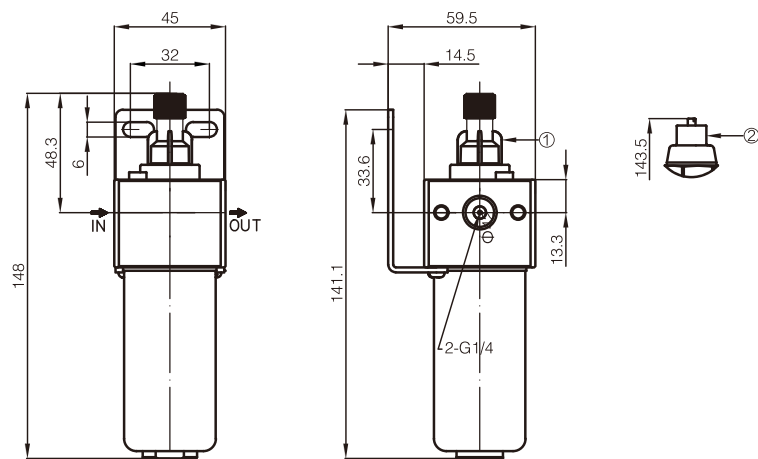


- 1. Low pressure visual oil window.
- 2. High pressure invisible oil window.

Lubricator bowl capacity
125cc

Model	Port size	Max. flow rae	Standard drain	Filter bowl capacity
SL-200-02	1/4"	2500 l/min	1150g	125cc


SL-400

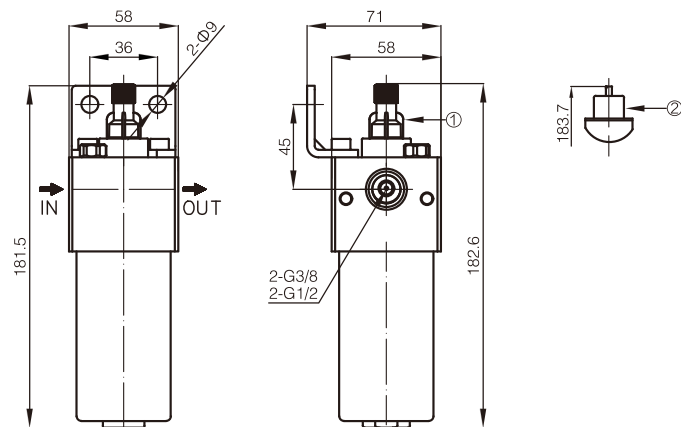

- 1. Low pressure visual oil window.
- 2. High pressure invisible oil window.

Model	Port size	Max. flow rae	Standard drain	Filter bowl capacity
SL-400-03	3/8"	2525 l/min	1700g	130cc
SL-400-04	1/2"	4100 l/min	1680g	130cc

SL-600

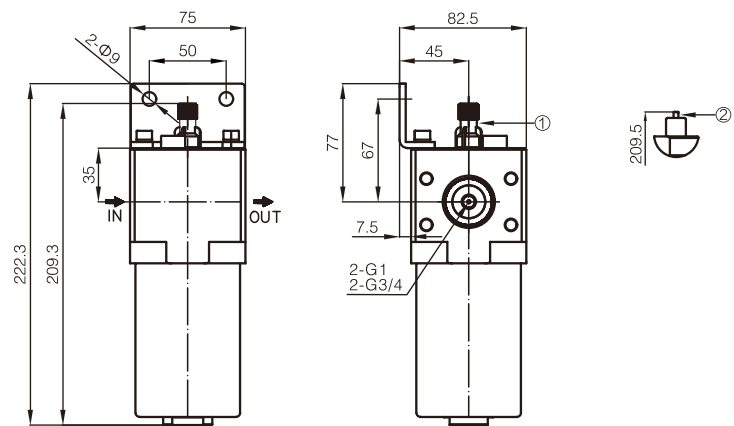

- 1. Low pressure visual oil window.
- 2. High pressure invisible oil window.

Model	Port size	Max. flow rae	Standard drain	Filter bowl capacity
SL-600-06	3/4"	13200 l/min	3300g	200cc
SL-600-10	1"	13200 l/min	3270g	200cc

FRL

AC/BC

AFC/BFC

AFR/BFR

AF/BF

AR/BR

AL/BL

SR

SDR

AC

AW

AF

AR

AL

F3

F2

F1

F

R

L

USFRL

SFR/L

SFR

SF

SR

SL

QSL

QTY

QIU

QTYH

QSLH

QFRH

AFF

AF(Big)

AL(Big)

AR(Big)

AD402

AH402

AD-5

IR

ITV

ACR

F804

PG