

Fittings, Air Hose

Quick Fittings

Mini Quick Fittings

Rotary Joint

Stop Fittings

Check Valves

Speed Controllers

Hand Valves

Ball Valves

Air Control Valves

Push-IN Fittings

316L Fittings

KIS-A (ISO A)

KIS-B (ISO B)

KIS-O

KIS-PP

KZD

KZF

ST

TSP

310 (ISO-B6)

430 (ISO-B8)

550 (ISO-B12)

20 (Super Mini Type)

21 (Mini Type)

320 (EURO 7.6)

410 (EURO 10.5)

210 (ARO210)

19 (ASIA)

200 (ASIA)

Pipe Fittings

Brass Ball Valves

US98A, UE95A

UCS

PA12, PA6

UN54D

Air Gun

Tracheal Scissors

Silencers



Flow capacity: 430L/Min
Nominal flow dia: 4.8mm

Material:
Chrome-plated steel

Temperature range(NBR): -20°C to +80°C
Max.working pressure: 35 Bar

Standard and interchange:
PCL 60, Rectus 19

Feature:
Double hand operation or Single hand operation.
Compact and light design with a multitude of connecting options.




Dimensions

Socket

SM Type


Male

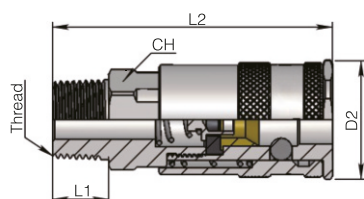

PART NO.				
Info	Thread	D2	L2	CH
19-SM	R 1/4	26	43	22
	R 3/8	26	43	22
	R 1/2	26	46	22

SF Type


Female



PART NO.				
Info	Thread	D2	L2	CH
19-SF	G 1/4	26	43	22
	G 3/8	26	43	22
	G 1/2	26	46	22

SH Type


Hose barb

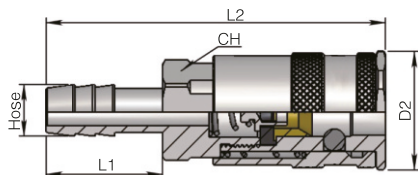

PART NO.				
Info	Hose	D2	L2	CH
19-SH	6	26	60	22
	8	26	60	22
	10	26	60	22
	13	26	60	22


Plug

PM Type Male




PART NO.				
Info	Thread	L2	CH	
19-PM	R 1/4	41	14	
	R 3/8	41	17	
	R 1/2	46	22	

PH Type Hose barb



PART NO.			
Info	Hose	L2	
19-PH	6	49	
	8	49	
	10	49	
	10	49	

PF Type Female



PART NO.				
Info	Thread	L2	CH	
19-PF	G 1/4	35	17	
	G 3/8	35	19	
	G 1/2	38	24	