


Flow capacity: 165L/Min
Nominal flow dia: 2.7mm

Material:
Socket: Nickel-plated brass
Plug: Nickel-plated brass

Temperature range(NBR): -20°C to +100°C
Max.working pressure: 35 Bar

Standard and interchange:
Rectus 20ka, Festo 20, Legris series 20,
Walther 06-003, Bosch size 2

Feature:
One-hand operated, Super mini size

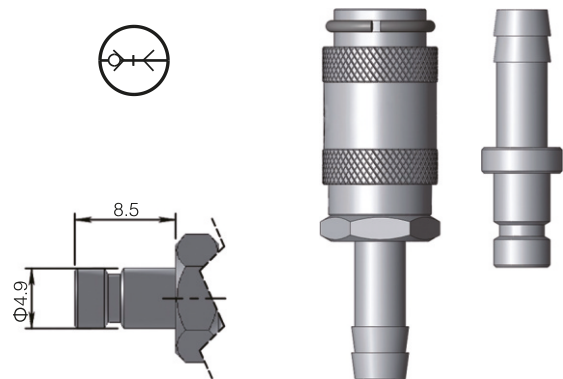


Dimensions

Socket


SF Type

Feale




SM Type

Male




SN Type

Nut for hose




SNB Type

Bulkhead nut




SH Type

Hose barb



SHB Type

Bulkhead Hose



PART NO.				
Info	Thread	D2	L1	CH
20-SF	M5×0.8	10	26	9
	G1/8	10	28	12


PART NO.				
Info	Thread	D2	L1	CH
20-SM	M5×0.8	10	26	9
	G1/8	10	28	12

PART NO.						
Info	Tube	D2	L1	CH	D1	Ch2
20-SN	4×2.5	10	33	9	-	-
	5×3	10	35	9	-	-
	6×4	10	35	9	-	-
20-SNB	4×2.5	10	43	9	M7×0.75	11
	5×3	10	45	9	M7×0.75	11
	6×4	10	45	9	M8×1	12

PART NO.						
Info	Hose	D2	L1	CH	D1	Ch2
20-SH	3	10	35	9	-	-
	4	10	35	9	-	-
	5	10	35	9	-	-
20-SHB	3	10	45	9	M7×0.75	11
	4	10	45	9	M7×0.75	11
	5	10	45	9	M7×0.75	12


Plug

PM Type Male




PART NO.			
Info	Thread	L1	CH
20-PM	M5×0.8	17	8
	G1/8	20	12

PF Type Female




PART NO.			
Info	Hose	L1	CH
20-PF	M5×0.8	16	8
	G1/8	19	12

PH Type Hose barb




PART NO.				
Info	Hose	L1	CH	D2
20-PH	3	24	-	-
	4	24	-	-
	5	24	-	-

PN Type Nut for hose




PART NO.				
Info	Nut	L1	CH	D2
20-PN	4×2.5	23	7	-
	5×3	25	8	-
	6×4	25	8	-

PHB Type Bulkhead hose



PART NO.				
Info	Hose	L1	CH	D2
20-PHB	3	35	11	M7×0.75
	4	35	11	M7×0.75
	5	35	12	M7×0.75

PNB Type Bulkhead hose



PART NO.				
Info	Nut	L1	CH	D2
20-PNB	4×2.5	38	11	M7×0.75
	5×3	38	11	M7×0.75
	6×4	38	12	M10×1

Fittings,
Air Hose

Quick
Fittings

Mini Quick
Fittings

Rotary Joint

Stop
Fittings

Check
Valves

Speed
Controllers

Hand
Valves

Ball
Valves

Air Control
Valves

Push-IN
Fittings

316L
Fittings

KIS-A
(ISO A)

KIS-B
(ISO B)

KIS-O

KIS-PP

KZD

KZF

ST

TSP

310
(ISO-B6)

430
(ISO-B8)

550
(ISO-B12)

20 (Super
Mini Type)

21
(Mini Type)

320
(EURO 7.6)

410
(EURO 10.5)

210
(ARO210)

19
(ASIA)

200
(ASIA)

Pipe
Fittings

Brass Ball
Valves

US98A,
UE95A

UCS

PA12,
PA6

UN54D

Air Gun

Tracheal
Scissors

Silencers