

FRL  
AC/BC  
AFC/BFC  
AFR/BFR  
AF/BF  
AR/BR  
AL/BL  
SR  
SDR  
AC  
AW  
AF  
AR  
AL  
F3  
F2  
F1  
F  
R  
L  
USFRL  
USFR/L  
USFR  
USF  
USR  
USL  
QSL  
QTY  
QIU  
QTYH  
QSLH  
QFRH  
AFF  
AF(Big)  
AL(Big)  
AR(Big)  
AD402  
AH402  
AD-5  
IR  
ITV  
ACR  
F804  
PG




### Product feature

1. Directly assembled with small pneumatic tools.
2. Filtrate moisture, airborne solid contaminants such as pipe scale, rust, condensation from airlines.
3. The clear filter bowl allows a visual inspection of condensation and so can be removed through the drain valve at the bottom.
4. 1/4" Thread size for most spray guns-standard 1/4 thread will fit most spray guns and airlines. (NPS or G thread are available).
5. Widely used in the the Woodworking/Furniture making and all industrial work.
6. Compact & Light weight-The whole set is made of high quality aluminum alloy + Polycarbonate, compact design for easy install and operation, light weight for carrying and potable for outdoor work.

### Specifications

Material: Aluminum alloy + PC + 100 mesh copper core filter element  
Main color: Blue (as pictures shown, red color is available)  
Item size: 10x4cm  
Pipe size: (the female and male thread) 1/4" (NPS or G)  
Working pressure: (1~9) Bar (1-136Psi)  
Weight: about 103g

### Inner structure

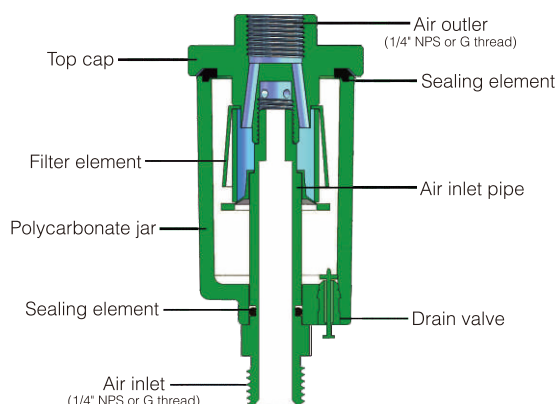

### Component material list

| Part name         | Material                       |
|-------------------|--------------------------------|
| Top cap           | Aluminum alloy                 |
| Filter element    | Copper or PP                   |
| Polycarbonate jar | Polycarbonate                  |
| Sealing element   | NBR                            |
| Air inlet         | Steel or brass (chrome plated) |
| Drain valve       | Brass                          |

### Optional coupling

ISO-B6 Standard type pneumatic quick couplings for america market



Reference quick coupling  
Page: **567**

ASIA Standard type pneumatic quick couplings for asia market



Reference quick coupling  
Page: **575**

ARO210 Standard type pneumatic quick couplingsfor america market



Reference quick coupling  
Page: **574**

EURO 7.6 Standard type pneumatic quick couplingsfor europe market



Reference quick coupling  
Page: **572**

### Dimensions

