


FRL
AC/BC
AFC/BFC
AFR/BFR
AF/BF
AR/BR
AL/BL
SR
SDR
AC
AW
AF
AR
AL
F3
F2
F1
F
R
L
USFRL
USFR/L
USFR
USF
USR
USL
QSL
QTY
QIU
QTYH
QSLH
QFRH
AFF
AF(Big)
AL(Big)
AR(Big)
AD402
AH402
AD-5
IR
ITV
ACR
F804
PG

Symbol



Ordering code


AFF		350	04	D	
Series		Body size	Port size	Automatic drainer	
AFF	Main line filter	350	1/2"	04	1/2"
		550	1"	10	1"
		650	1½"	14	1½"

Specification

Model	AFF350-04	AFF550-10	AFF650-14
Port size	1/2"	1"	1½"
Rating flow (L/min)	1500	3700	6000
Max. working pressure	1.0MPa		
Ensured pressure	1.5MPa		
Min. working pressure	0.05MPa		
Operating temperature	-5~60℃ (Not frozen)		
Filter precision	3µm (Remove 95%)		
Element replacement period	At press. Differential 0.1MPa		

Note: PT thread, G thread and NPT thread are available.

Dimensions

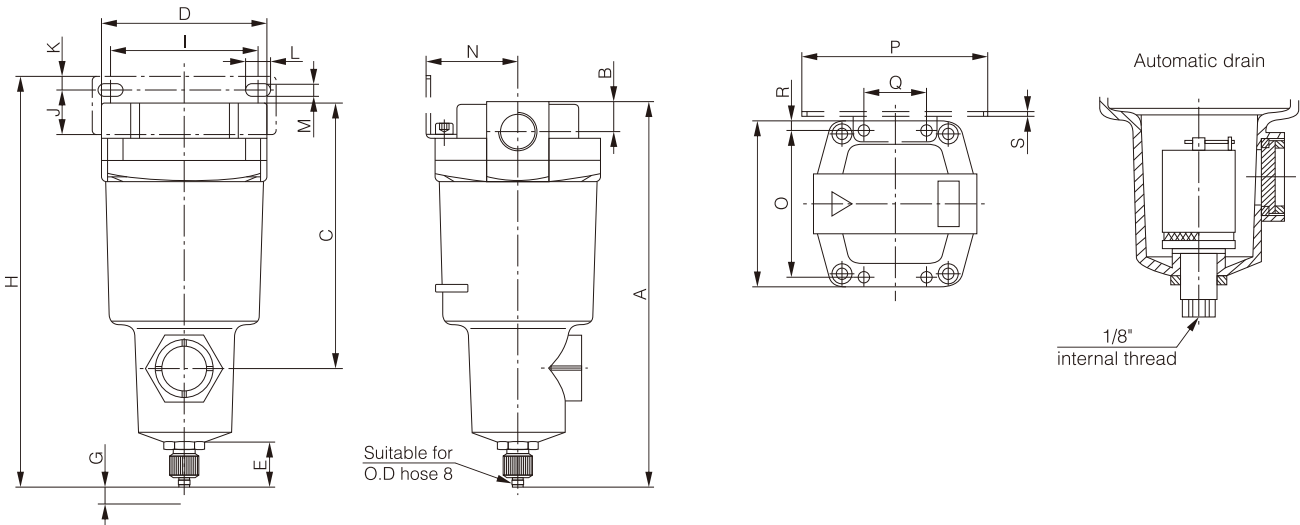

Model	Port size	A	B	C	D	E	F	G	Installation size											
									H	I	J	K	L	M	N	O	P	Q	R	S
AFF350	1/2"	209	16	145	90	24	90	10	224	80	23	8	14	7	50	80	97	34	5	2.3
AFF550	1"	265	22	200	122	24	122	10	283	100	30	10	16	9	65	102	126	60	10	3.2
AFF650	1½"	315	32	253	160	24	160	10	336	150	38	15	20	11	85	136	180	76	12	4.5