




Symbol



Specification


Model	QSLH-08	QSLH-10	QSLH-15	QSLH-20	QSLH-25
Operating fluid	Air or inert gas				
Pipe size	1/4"	3/8"	1/2"	3/4"	1"
Filter precision	20µm or 40µm				
Pressure range	0.15~4.0MPa				
Max. input pressure	4MPa				
Operating temperature	5~80°C				

Note: PT thread, G thread and NPT thread are available.

Ordering code

QSLH		-		-		15	
Model		Material		Port size			
QSLH	High pressure filter	Blank	Aluminium	08	1/4"	20	3/4"
		S	Stainless steel	10	3/8"	25	1"
				15	1/2"		

Dimensions

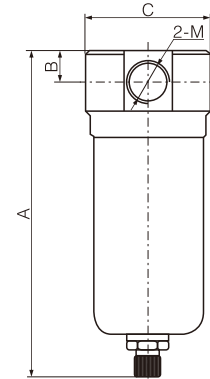


Bore	A	B	C	M
10	160	15	60	3/8"
15	160	15	60	1/2"
20	215	75	90	3/4"
25	215	75	90	1"

QFRH Series High Pressure Fitter & Regulator



Symbol



Specification

Model	QFRH-08	QFRH-10	QFRH-15	QFRH-20	QFRH-25
Operating fluid	Air or inert gas				
Pipe size	1/4"	3/8"	1/2"	3/4"	1"
Filter precision	20µm or 40µm				
Pressure range	0.05~3.5MPa				
Max. input pressure	4MPa				
Operating temperature	-25~+80°C				

Note: PT thread, G thread and NPT thread are available.

Ordering code

QFRH		-		-		15	
Model		Material		Port size			
QFRH	High pressure fitter & regulator	Blank	Aluminium	08	1/4"	20	3/4"
		S	Stainless steel	10	3/8"	25	1"
				15	1/2"		

Dimensions

