



QX22-10




QX23-08



QX23-08-S

Symbol



Product feature

Brass direct acting solenoid valve, suitable for neutral gas and liquid, including compressed air, natural gas, water, hydraulic oil and technical vacuum. Compact design, high quality VITON seal.

Ordering code

QX		22		08		S		V		AC220V			
Model		Valve type		Port size		Coil form		Sealing material		Standard voltage			
QX	Direct-acting solenoid valve	22	2/2 way	08	Z1/4"	Blank	Round coil	Blank	NBR	DC12V			
		23	3/2 way	10	Z3/8"	S	Square coil IP65	E	EPDM	DC24V			
										V	VITON	AC24V	50Hz/60Hz
										SI	SI	AC110V	50Hz/60Hz
												AC220V	50Hz/60Hz
												AC380V	50Hz/60Hz

Specifications


QX22 Series

Model	Port connection	Orifice size	CV Value	Pressure difference(MPa)	Overall size		Power VA
QX22-08	Z1/4"	4	0.43	0~0.9	40	75	10W
QX22-10	Z3/8"						
The following orifice need to be customized							
-		2.4	0.21	0~2.0	-		
-		5	0.5	0~0.6	-		

QX23 Series

Model	Orifice size		Port connection	Pressure difference (MPa)	Overall size		Standard voltage	Power VA
	Top	Body			L	H		
QX23-08	2.3	1.6	Z1/4", Z3/8" Optional	0~0.9	41	95	AC: 380V, 220V, 36V	10W
QX23-10	2.3	1.6					DC: 220V, 24V	

Dimensions

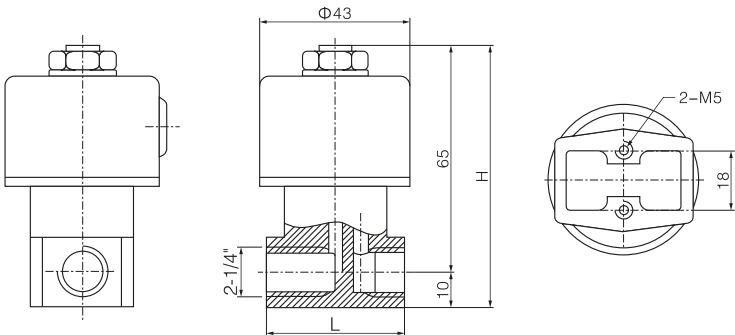

Model	L	H
QX22-08	40	75
QX22-10	40	75
QX23-08	41	95
QX23-10	41	95

Valve

2P
2V
2W
2W(Big)
2WB
2WBF
US(2L)
DG223
DG523
0927/0955
PU220
PU225
VX

QX

PT
Q24JH
K23JH
K25JH
K25JH
K35JH
K23JD
K25JD
K25JK
PV100
PV200
PV300
PV400
PV500
PV700
PV800
PV1527
PVN
MV100
MV200
NAA
GT
K
R
FAL
FP-M
NTP
SX